


Heightrider 15_N

The Nifty Height Rider 15N offers one of the best working envelopes in its class. Designed using the latest computer technology, it delivers unrivalled working outreach combined with pinpoint accuracy when positioning the platform. A super narrow base as standard with the option of Bi-Energy power makes it ideal for a wide range of applications.

Safety Features

- Automatic failsafe brakes
- Tilt alarm
- Solid tyres
- Emergency descent system with hand-pump
- Dual controls (platform & base)
- Lock valves on all hydraulic cylinders
- **Dual Harness Points**
- CE Mark

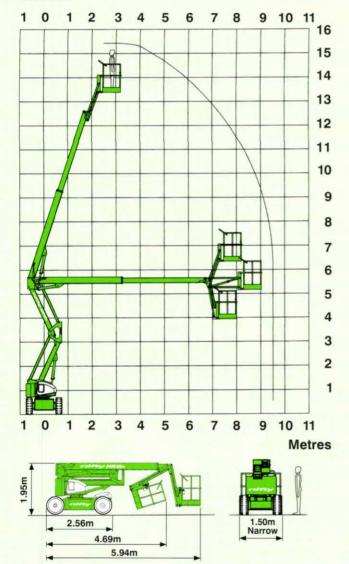





With more outreach than any other machine in its class and a base width of only 1.50m, the HR15N is one of the most effective and versatile self-propelled platforms available.

Specifications

•	
15.60m	51ft
13.60m	44ft 7in
9.60m	31ft 6in
360°	
150°	
1.50m	4ft 11in
1.95m	6ft 6in
5.94m	19ft 6in
6400kg	14,097lbs
1.21m	3ft 11in
3.31m	10ft 10in
100°	
225kg	500lbs
1.50m x 0.70m	60in x 29in
4kmph	2.5mph
25%	
Solid, non-marking optional	
Fully proportional electric over hydraulic	
Bi-Energy, with Kubota 722 3 cylinder diesel Battery only	
	15.60m 13.60m 9.60m 360° 150° 1.50m 1.95m 5.94m 6400kg 1.21m 3.31m 100° 225kg 1.50m x 0.70m 4kmph 25% Solid, non-markir Fully proportional e

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:



Manufacturers of trailer mounted,

self propelled and vehicle mounted

Niftylift Ltd Fingle Drive

Stonebridge Milton Keynes **MK13 0ER** England

www.niftylift.com e.mail: info@niftylift.com Tel: +44 (0)1908 223456 Fax: +44 (0)1908 312733